

2





1/2 " N

ج

پ

~ O

~

~

ٲ

ٲ

105~

ٲ

ٲ

105~

ج

ج ~

1/2 " N

ج O

1 1/2 " N

2022 1 1 -2022 12 31

ج

48.3 kg CO₂-eq

~

ج

آ

پ


ٲ

ISO 14040:2006

ٲ



1.	ଞ		3
2.			3
3.	ଞ		3
4.			

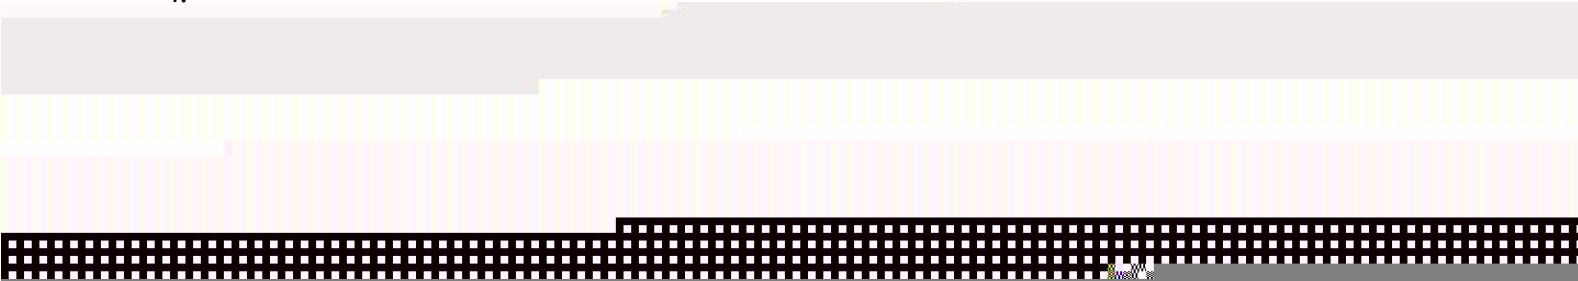



٤

ج

٧١١

PVC

4.2

1/2 " N

ج

4.3

ج

١

ؤ

ج

١

ؤ

ج

١

ج

ؤ آ

١

١

ج

١

ؤ آ

١

١

٧١١

ج

آ

4.4

4.4.1



þ ~

W-08-23-0884

5

11

4.4.2



Pin	NML1/2H.00.02-HPb55-3/-HX 3		0.9	g
Inner core	NML1/2B.02.02- /-HX 3		1.24	g
U Rear insulator	NML1/2F.00.08-TPX/-	TPX	0.15	g
Insulator	NML1/2F.00.07-TPX/-	TPX	0.25	g
Seal ring	NML1/2H.00.06-R01/-		0.15	g
PVC PVC flat pad	NML1/2E.00.08-PVC R01/-	PVC	0.22	g
∇ Circlip	NML1/2F.00.06-SUS304/-	304#	0.37	g
packaging			1/300	p

2

Λ				
Λ		5T	171	km
		30T	57	

3

--	--



þ ~

W-08-23-0884

7

11

Fransiska

m

- -

.

08



α	β	2022	1	1	2022	12	31
$\bar{\alpha}$	$\bar{\beta}$	$\bar{U}$	$\bar{i}$				

6.2

 $\leq 0.5\%$ ج

6.2.1

cut-of

6.2.2

ج غ □

6.3

2019

GWP100

2

7

48.3

kgCO₂-eq

Upstream transportation

0.003

1 Raw material assembly

8.57

Packaging

0.121

Downstream transportation

39.6

A

7

kgCO₂-eq

Enclosure

0.737

Inner core

0.783

Seal ring

0.777

Screw insert

0.788

✓ Circlip

0.24

Insulator

1.29

U Rear housing

0.787

U Rear insulator

0.777

Cable clamp

0.661



W-08-23-0884


9

11


Pin
PVC PVC flat pad

0.584
1.14

7.1

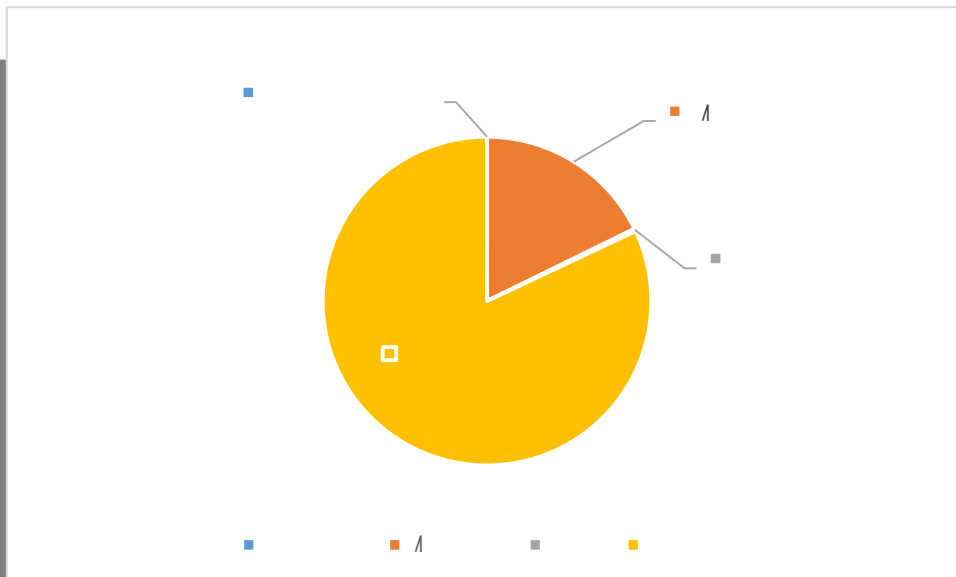

1

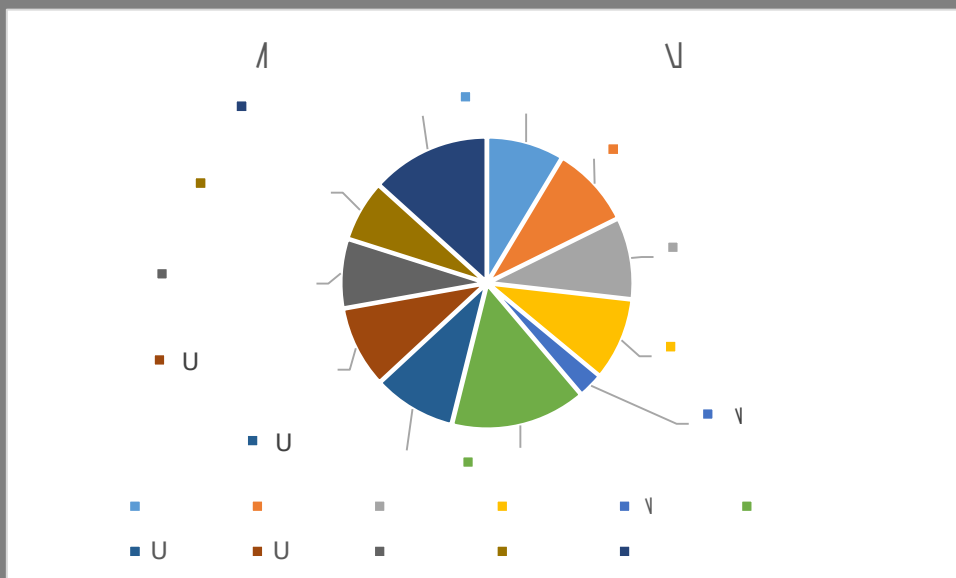


2 A

V




7.2


7.2.1

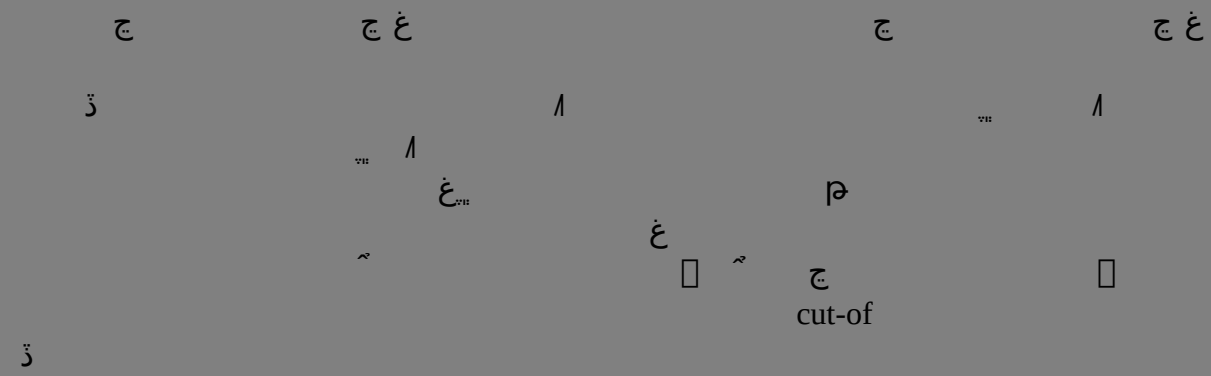

7.2.2

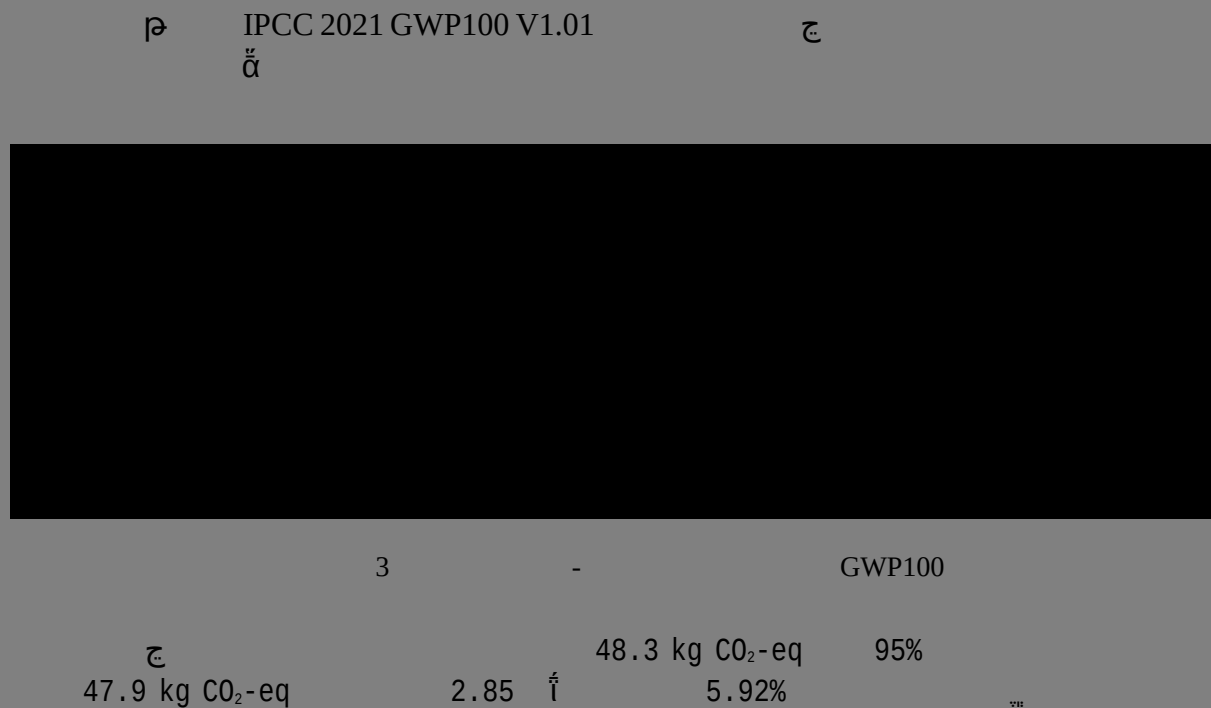

7.3

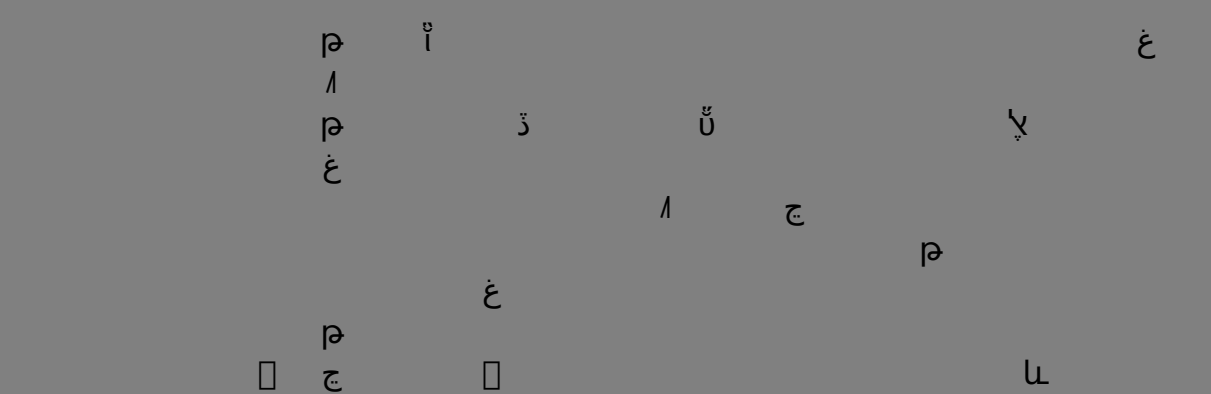



2023

8

8.1

3

8.2

U

8.3

U

8.4

U

